


1001 SERIES USB B Type Receptacle Connectors

Specifications/技术参数:

Insulator(塑胶本体):	PBT+30% G.F. UL 94V-0
Contacts(接触件):	Brass
Shell(外壳):	Brass or SPCC
Insertion Force(插入力):	35N max
Withdrawal Force(拔出力):	10N min
Durability(插拔次数):	1500 cycles min
Current Rating(额定电流):	1.5A
Voltage Rating(额定电压):	30V
Withstand Voltage(耐压值):	500VAC for one minute
Contact Resistance(接触电阻):	30mΩ max
Insulation Resistance(绝缘电阻):	1000MΩ min
Temperature Range(工作温度):	-55°C~+85°C
Plating options(电镀选项):	
Shell(外壳):	Nick over all plating
Contacts(接触件):	Gold Flash and Tin Plated over all

USB B Type Straight

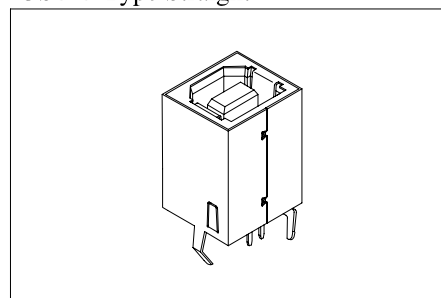


Unit/单位: mm

Dimension/尺寸: mm

1001 B S - 04 F - WH


WH: White(白胶)
BK: Black(黑胶)
F: Female(母座)
04: 4Pin
S: Straight(直插)
B: USB B Type

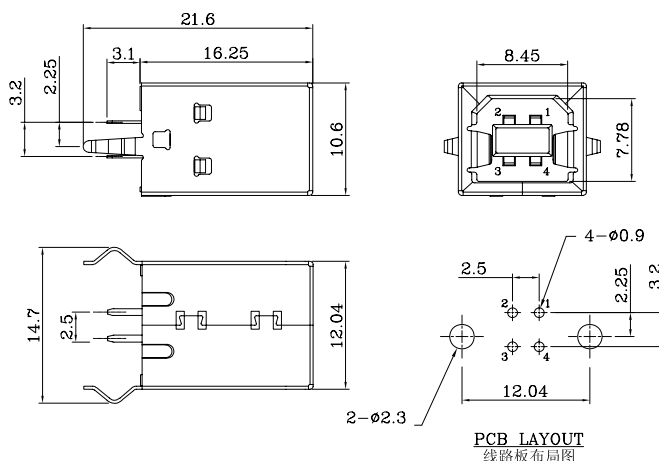

Specifications/技术参数:

Insulator(塑胶本体):	PBT+30% G.F. UL 94V-0
Contacts(接触件):	Brass
Shell(外壳):	Brass or SPCC
Insertion Force(插入力):	35N max
Withdrawal Force(拔出力):	10N min
Durability(插拔次数):	1500 cycles min
Current Rating(额定电流):	1.5A
Voltage Rating(额定电压):	30V
Withstand Voltage(耐压值):	500VAC for one minute
Contact Resistance(接触电阻):	30mΩ max
Insulation Resistance(绝缘电阻):	1000MΩ min
Temperature Range(工作温度):	-55°C~+85°C
Plating options(电镀选项):	
Shell(外壳):	Nick over all plating
Contacts(接触件):	Gold Flash and Tin Plated over all

USB B Type Right Angle

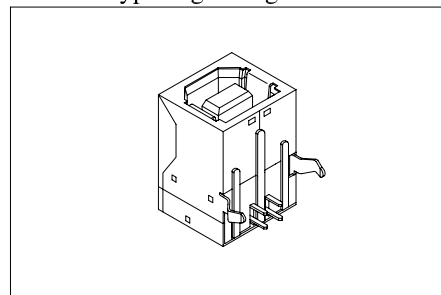

Unit/单位: mm

Dimension/尺寸: mm

1001 B R - 04 F - WH

WH: White(白胶)
BK: Black(黑胶)
F: Female(母座)
04: 4Pin
R: Right Angle(弯插)
B: USB B Type

