

Specifications/技术参数:

Electrical/电气特性:

Current Rating(额定电流): 1A

Withstand Voltage(耐压值): 500VAC for one minute

Contact Resistance(接触电阻): 20mΩ max

Insulation Resistance(绝缘电阻): 1000MΩ min

Operating Temperature(工作温度): -40°C ~ +105°C



Physical/物理特性:

Insulator(塑胶本体): P.B.T or PA6T +30%GF, Color Black

Flammability Rating(防火等级): UL 94V-0

Contacts(接触件): Phosphor Bronze

Contacts plating(接触件电镀): Gold flash over Nickel

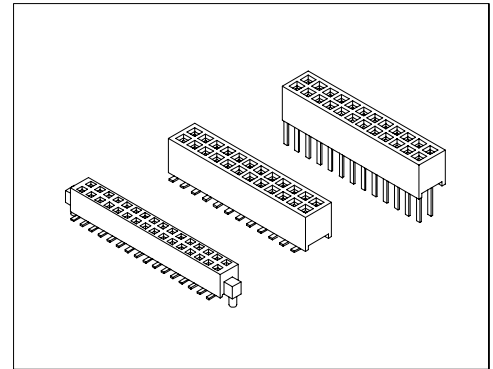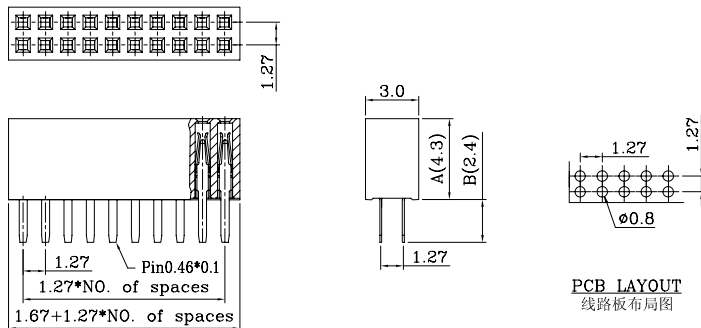Dimension/尺寸: mm

1.27*1.27mm Female header/排母


Dual row 06 to 100 contacts/双排6-100芯

Profile/塑高: 4.3mm

Pin length/焊板针长: 2.4mm

Ordering Code/订购型号:

203-1/B-S-3C-2*nPG-4.3/2.4

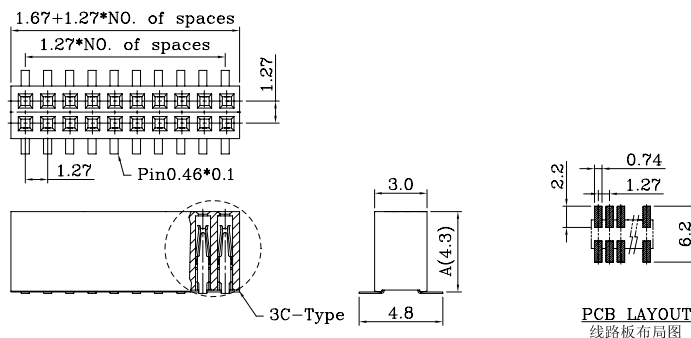


1.27*1.27mm SMT Female header/贴片排母

Dual row 06 to 100 contacts/双排6-100芯

Profile/塑高: 4.3mm

Ordering Code/订购型号:

203-1/B-SMS-3C-2*nPG-4.3

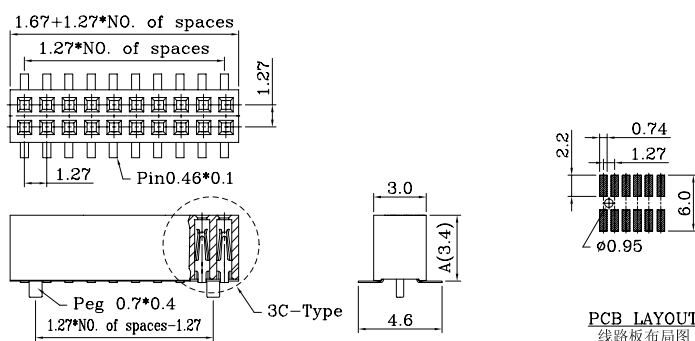

1.27*1.27mm SMT Female header/贴片排母


Dual row 06 to 100 contacts/双排6-100芯

Profile/塑高: 3.4mm

W1: With Locating peg/带内定位柱

Ordering Code/订购型号:

203-1/B-SMS-3C-2*nPG-3.4-W1

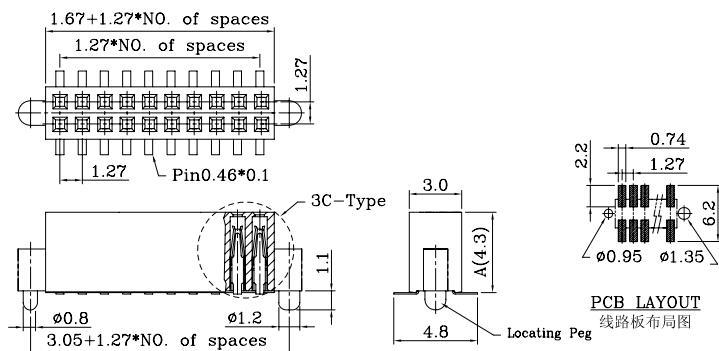

1.27*1.27mm Female header/排母
Dual row 06 to 100 contacts/双排6-100芯
Profile/塑高: 4.3mm
W2: With Locating peg/带外定位柱
Ordering Code/订购型号:
203-1/B-SMS-3C-2*nPG-4.3-W2

Ordering Code/订购型号:

1 2 3 4 5 6 7
203-1/B — SMS — 3C — 2*nP G — A/B — W1

1. Series No./系列号: 203-1/B

2. PCB Mount Type/安装类型:

S = Vertical DIP Type(直插)

SMS = Vertical SMT Type(立贴)

3. Contacts Type/接触件类型:

Y = Y-Type(二面包)

3C = 3C-Type(三面包)

4. Poles/位数:

Dual/双排: 2*3P ~ 2*50P

5. Contacts plating/接触件电镀:

S = Selective Gold(半金)

G = Gold flash(全金)

6. Dimension/尺寸: A/B

7. Options/选项:

W1 = With Locating Peg(带内定位柱)

W2 = With Locating Peg(带外定位柱)